

# Nu Mail Letterplate



## **Features**

- Midrail and panel letterplate options to suit doors 20mm-80mm thick Suits a range of door thickness
- Fully colour matched metal letterplate Quality and durability you can see and feel
- · Anti-snap flap opens to 180° with fully sprung return Easier to operate, no broken flaps, even with Sunday papers
- 12" letterplate with a 10" aperture Meets Royal Mail standards, will easily take A4 size post
- Fully weather Sealed (with rubber gasket)\* No draft, no rain water
- Secure through fixing ensures letterplate can only be removed from the inside of the

Prevents burglars gaining access to the cylinder internally

- · Can be through fixed or face fixed Flexible according to fabricator preference
- Outstanding acoustic insulation\* Perfect for flats, or houses near busy roads
- Supplied with screw fixings Everything needed for installation included
- · Secured by Design Additional peace of mind

\*For best acoustic and weather performance we recommend installing the product with a rubber gasket



Silver



Satin





Grey





Graphite



Black





Hardex



Rose



Pewter













# Nu Mail Letterplate

# Ordering Details Product Nu Mail Letterplate

	-			
Finish		F	art No.	
	Panel 68 (20-40)	Midrail 68 (40-80)	Panel 76 (20-40)	Midrail 76 (40-80)
Hardex Chrome Hardex Bronze Hardex Gold Hardex Graphite Hardex Pewter Hardex Rose Antique Black Anthracite Grey White Black Silver Premium Satin D	3C301 3C303 3C305 3C311 - - 3C306 - 3C300 3C308 3C309	3C101 3C103 3C105 3C111 - 3C106 3C112 3C100 3C108 -	3C201 3C203 3C205 3C211 - - 3C206 - 3C200 3C208 3C209	3C001 3C003 3C005 3C018 3C011 DLPNMHRMI76 3C006 - 3C000 3C008 3C009
*Easy Fit Rubber Drip Gasket 98000				

## **Technical Information**

#### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

#### Operation

Flap cycle tested to 30,000 cycles

Conforms to the requirements of BS EN 13724: 2002

#### Performance

Tested as part of a complete door set that successfully achieved PAS 24. 30 minute fire test to BS 476: Part 20/22: 1987

#### Screws


Midrail version includes 2 x M5 x 45mm machine screws, 2 x M5 x 63mm machine screw, 2 x M5 x 74mm machine screws and 2 screw guides Panel version includes 2 x M5 x 28mm machine screws and 2 screw guides


# Material Specification

Coatings: Hardex Chrome, Hardex Bronze, Hardex Gold, Hardex Graphite, Hardex Pewter, Hardex Rose, Antique Black, Anthracite Grey, Premium Satin, White, Black and Silver.	Frame and Flap:	High quality Zinc
	Coatings:	Hardex Gold, Hardex Graphite, Hardex Pewter, Hardex Rose, Antique Black, Anthracite Grey, Premium Satin, White,


# Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

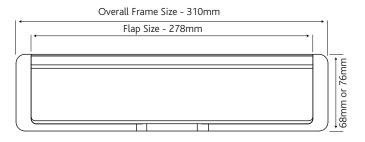









All dimensions are in mm and are nominal.

Fab&Fix reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that the
finished product meets any required safety and performance specification.

## **Packaging**

## Nu Mail Letterplate

Individually boxed with fixings and care instructions.

15 letterplates in an outer box.