

ERA


172

Dummy Knob Handle - Face Fix Fitting Instructions

Installing a Dummy Knob Handle

To fit a Dummy Knob Handle you will require the following tools:
- Posidriv Screwdriver

- A** The central hole on the rear of the plate is used to through fix the door knob, using the fixing bolt, from the other side of the door.
- B** Align and mark the location of the knob handle on the door. Drill a hole (if required) and cut fixing bolt to the required length.
- C** Hold the knob on the door, place the washer onto the fixing bolt and using a screwdriver secure the fixing bolt, be careful not to overtighten.

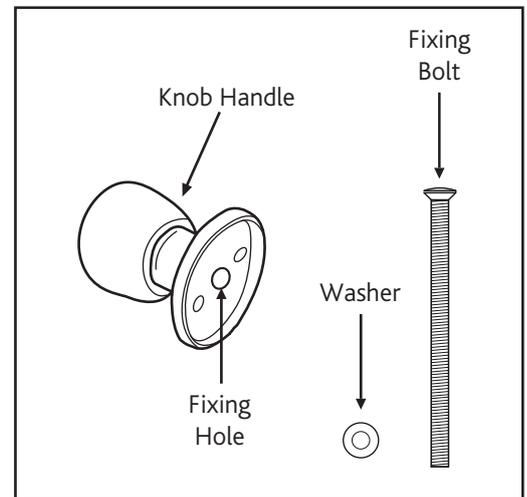

Removing the Knob Handle

Using a screwdriver, simply unscrew the fixing bolt from the back of the knob handle and remove from the door.